


ADN D1 Digital delegate discussion unit

FEATURES

- Gooseneck microphone with Sennheiser super-cardioid capsule
- High-performance twin loudspeakers
- Convenient cabling via RJ45 sockets
- Modern industrial design, hidden cable connections
- Strain relief available for fixed installations
- DSP limiter

The digital delegate unit ADN D1

offers high speech-intelligibility in a modern design. The gooseneck microphone is equipped with a super-cardioid capsule that attenuates unwanted ambient noise efficiently. A twin-loudspeaker system guarantees a homogenous sound level in the meeting room. The cabling of the units, which is done by CAT5 cables and hidden connections can be optionally secured with strain reliefs for fixed installations.

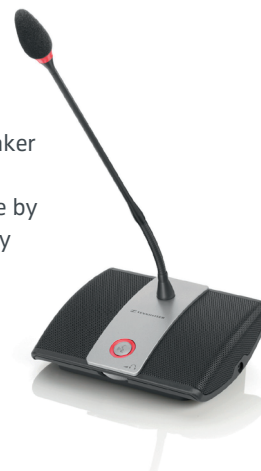

ARCHITECT'S SPECIFICATIONS

A digital desktop discussion microphone unit is provided for use as a delegate version for use with a central control unit. The digital desktop discussion microphone unit connects to the central control unit via network using industry standard Category 5 (24 AWG) cabling. The unit shall include a 15.47" long gooseneck microphone with a super-cardioid capsule. A 3.5mm headphone output jack shall be included. Twin loudspeakers are provided in a top-mounted orientation. RJ45 jacks for connection are provided by hidden connections beneath the unit; optional strain reliefs are provided for fixed installations. The audio signal path shall include a digital signal processor limiter. Operating voltage shall be 35vDC to 52.8vDC. Maximum power consumption shall be 3.8W. Total harmonic distortion shall be a maximum of 0.03% at 50mW/16 Ohms. Operating temperature shall be +10°C to +40°C. The unit dimensions shall be, without gooseneck microphone, 7.28" x 2.48" x 5.51" (WxHxD). Weight shall be approximately 1.5 lbs. The digital desktop delegate discussion unit shall be manufactured by Sennheiser and shall be type ADN D1.

TECHNICAL DATA


Operating voltage.....	35 V to 52,8 VDC
Power consumption	max. 3,5 W
Pick-up pattern	Super-cardioid
THD, total harmonic distortion	0,03 % at 50 mW / 16 Ω
Operating temperature	+10° C to + 40°C
Dimensions (WxHxD).....	185 x 63 x 140 mm (without gooseneck) 7,28" x 2,48" x 5,51"
Weight	approx. 700 g / 1,5 lbs

DELIVERY INCLUDES

- ADN D1 Delegate unit
- Quick-Guide

ADN D1 Digital delegate discussion unit

DIMENSIONS

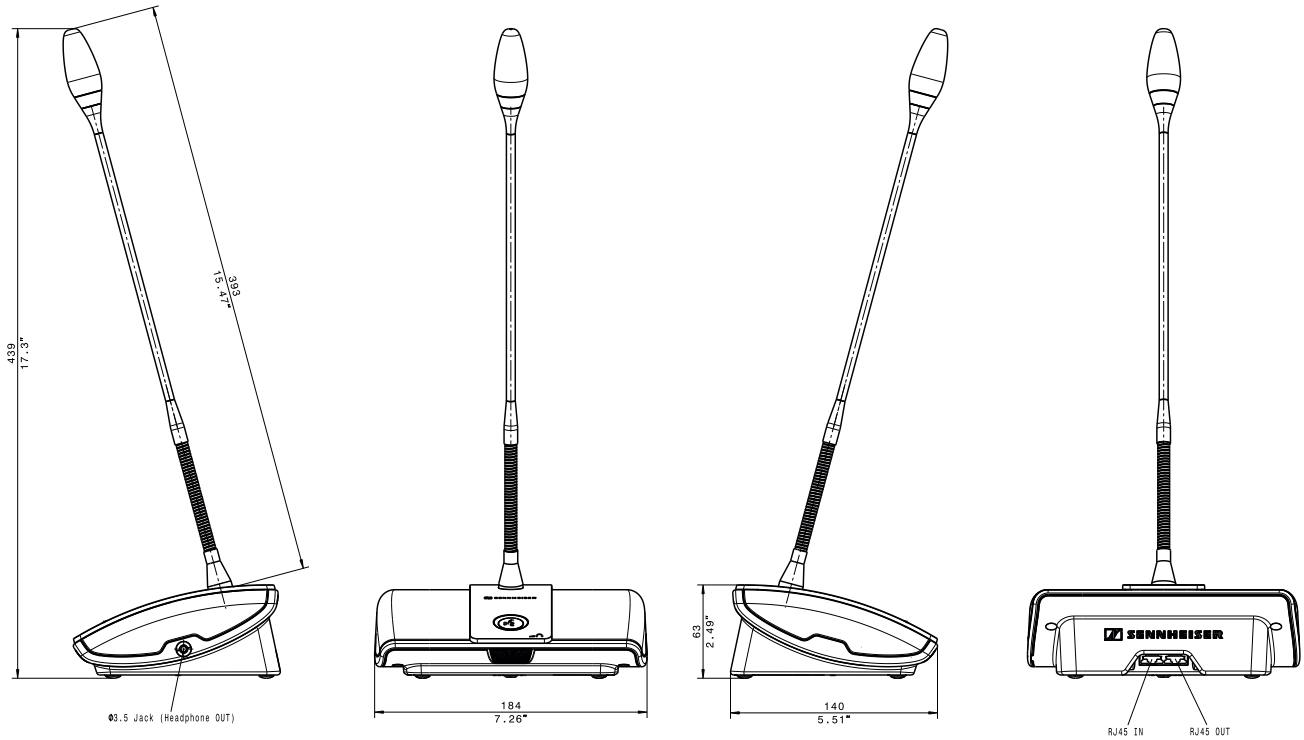

PRODUCT VARIANTS

502758 ADN D1 Delegate unit
502759 ADN C1 Chairperson unit

RECOMMENDED ACCESSORIES

ADN TR1, ADN strain relief	Cat.No. 504001
SDC CBL RJ45-2, Cat 5 cable 2m	Cat.No. 009842
SDC CBL RJ45-3, Cat 5 cable 3m	Cat.No. 009843
SDC CBL RJ45-5, Cat 5 cable 5m	Cat.No. 009844

SDC CBL RJ45-10, Cat 5 cable 10m	Cat.No. 009845
SDC CBL RJ45-20, Cat 5 cable 20m	Cat.No. 009846
SDC CBL RJ45-50, Cat 5 cable 50m	Cat.No. 009847
ADN CU1-EU central unit	Cat.No. 505553
ADN CU1-UK central unit	Cat.No. 505554
ADN CU1-US central unit	Cat.No. 505555
ADN PS-EU	Cat.No. 505546
ADN PS-UK	Cat.No. 505547
ADN PS-US	Cat.No. 505548

Sennheiser electronic GmbH & Co. KG
Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

 **SENNHEISER**